

EN

Piccola




blupura
ALWAYS COOLER

Piccola

15
lt/h



Gas
R600



BDC



Energy
Saving

“PICCOLA”, THE GREAT DESIGN SOLUTION
FOR BOTH HOME AND OFFICE.

All the water you want, and unrivaled practicality in a small space.

Attractive and incredibly compact in its dimensions, Piccola stands out for its versatility, in both aesthetic and functional terms. Available in white or black versions, to allow it to fit seamlessly into any surrounding, Piccola offers a full four dispensing options: still, slightly sparkling, sparkling cold water and room temperature water. The new Piccola OSMO model comes with the Blutron RO (Reverse Osmosis Membrane) and the Blutron Block 15K, which can be installed upstream as an optional.





The Piccola Hot model dispenses hot water up to 85°C, perfect for making teas and infusions. Piccola Hot features LED dispensing buttons with an alarm in the event of the absence of water, overflow or boiler malfunction, in addition to Energy Saving function.



Piccola is available in black or white to satisfy the taste of the user and to blend within any environment.



Choosing a product like Piccola means making a sustainable choice, giving up the plastic of the bottles and always having fresh quality water, still and sparkling.



Design and functionality! Piccola Cabinet is made entirely of black painted sheet metal, with a wider base equipped with rubber feet to ensure maximum stability. A lock allows access to the inner compartment, where filters and CO₂ cylinders are placed, in addition to tank filling alarm LED set-up.





The delivery area is illuminated and 27cm high allowing the insertion of bottles and water bottles.

The forced ventilation grille is positioned laterally, while the convenient drip tray is integrated.



Natural Gas
An environmentally friendly choice, with the benefit of a more silent compressor.

									
	Lt./h						Dispensing area	Weight	Dimensions
							He [mm]	[kg]	W x D x H [mm]
Piccola 15	15			•	•		281	12,5	240 x 451 x 425
Piccola 15 Fizz	15	•	•	•	•		281	16,3	240 x 451 x 425
Piccola Osmo 15 Fizz	15	•	•	•	•		281	19	240 x 451 x 425
Piccola Hot 15	15			•	•	•	281	14,2	240 x 451 x 425
Piccola Hot 15 Fizz	15	•		•	•	•	281	18,4	240 x 451 x 425
Piccola White 15	15			•	•		281	12,5	240 x 451 x 425
Piccola White 15 Fizz	15	•	•	•	•		281	16,3	240 x 451 x 425
Piccola White Hot 15	15			•	•	•	281	14,2	240 x 451 x 425
Piccola White Hot 15 Fizz	15	•		•	•	•	281	18,4	240 x 451 x 425


OPTIONAL EXTRAS

In-line filters		Filter + Head		Water pressure reducer
		UVC Led In		CO ₂ pressure reducer with 1 pressure gauge (only for Fizz models)
Outlet filters		UVC Led OUT		Incremental digital litre-counter 6000R or Decremental digital litre-counter 8000T
	or 	Nano Silver Pipe		Piccola Cabinet
Other		Bluprotection		5 Lt. tank with re-fill alarm (for use with Piccola Cabinet)

Given its commitment to continuous technological development, Blupura reserves the right to enhance or modify the products shown in this catalogue without prior notice.

TECHNICAL PROFILE

	PICCOLA 15 Fizz	PICCOLA Osmo 15 Fizz	PICCOLA Hot 15 Fizz	PICCOLA WHITE 15 Fizz	PICCOLA WHITE Hot 15 Fizz
Cooling capacity [Lt/h.]	15	15	15	15	15
Power supply	230 V - 50 Hz	230 V - 50 Hz	230 V - 50 Hz	230 V - 50 Hz	230 V - 50 Hz
Pump	Membrane carbonation pump	Membrane carbonation pump	Membrane carbonation pump	Membrane carbonation pump	Membrane carbonation pump
Cooling technology	BDC	Dry Cooling	BDC	BDC	BDC
Condensation	Ventilated condensation	Ventilated condensation	Ventilated condensation	Ventilated condensation	Ventilated condensation
Max. hot water temperature	-	-	82° C +/-5%	-	82° C +/-5%
Boiler capacity [Lt]	-	-	1	-	1
Power consumption [W]	600	190	810	600	1100
Max. absorption [A]	3,4	1,05	3,4	3,4	3,4
Materials	ABS plastic	ABS plastic	ABS plastic	ABS plastic	ABS plastic

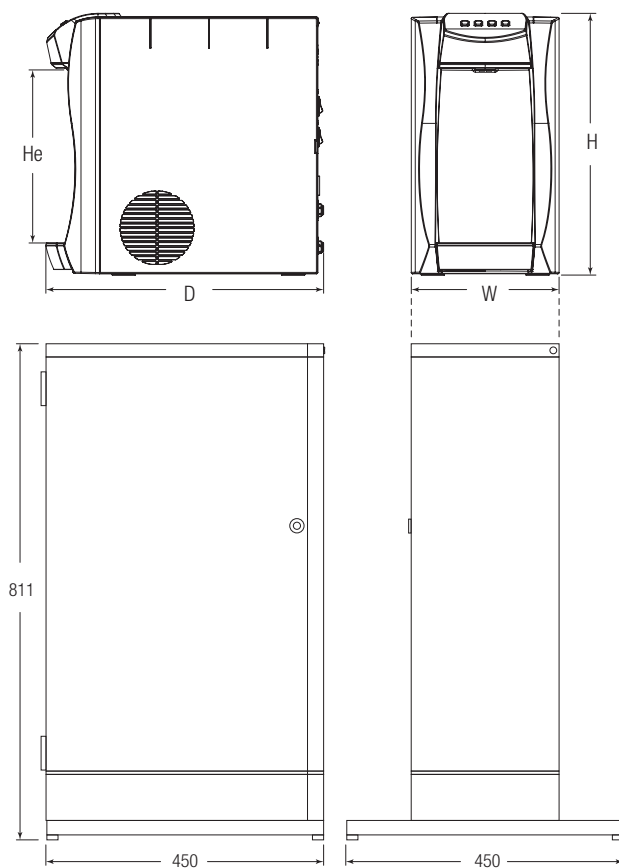



Blupura S.r.l. - Via Volponi, 11 - 62019 Recanati (Mc) - Italy
Tel. +39 071 971 0080 - info@blupura.com
Blupura Usa - 1200 Brickell Ave, Suite 1950 - Miami (FL) 33131 - USA - Tel. +1 305 777 3591 - blupurausa@blupura.com
www.blupura.com

